




safewaze.com | (P) 704-262-7893 | (F) 704-262-9051
322 Industrial Court, Concord, NC 28025

TECHNICAL DATA SHEET

FS-EX330-LERF

Portable Leading Edge Roof Reach

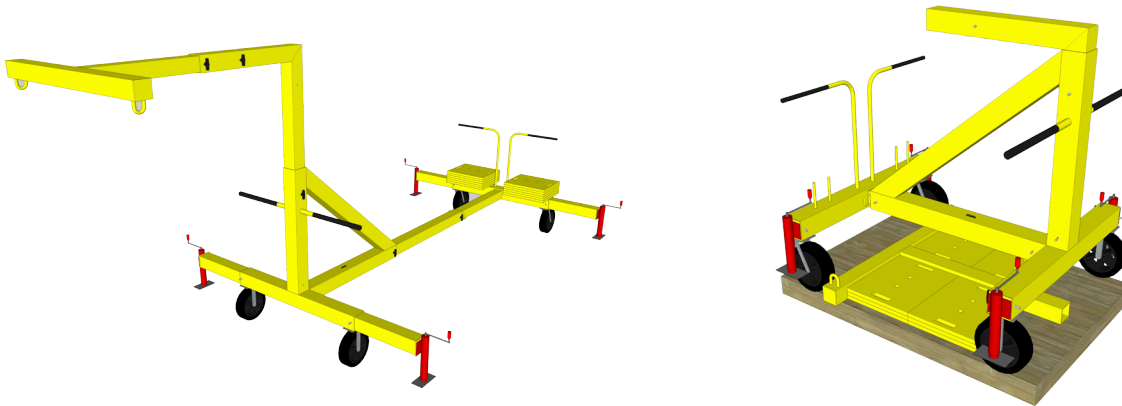

Description	Safewaze™ FS-EX330-LERF is a Portable Leading Edge roof fall protection system designed to mitigate Leading Edge hazards while maintaining worker fall protection safety.
Dimensions	Extended out for use footprint: 12'-8" long x 8'-7" wide x 8'-1" tall Folded up for transporting: 6' long x 5' wide x 5'-5" tall
Set-Up	In order to be connected for fall protection ALL weights must be on the back end of the unit. Unit must be fully extended out and pinned in proper places. Jack Stands must be engaged just enough to lift all 4 wheels off the ground.
Material	Mild grade steel
Capacity	2 users with max weight of 310 lbs each with tools and equipment
Weight	Without counterweights: 660 lbs. Each counterweight: 99 lbs. With counterweights: 1860 lbs.
Applicable Standards	Meets OSHA 1926.502 - ANSI Z359.1 - ANSI A10.32