




[safewaze.com](http://safewaze.com) | (P) 704-262-7893 | (F) 704-262-9051  
322 Industrial Court, Concord, NC 28025

## TECHNICAL DATA SHEET

### FS-EX212

#### Beam Trolley Anchor

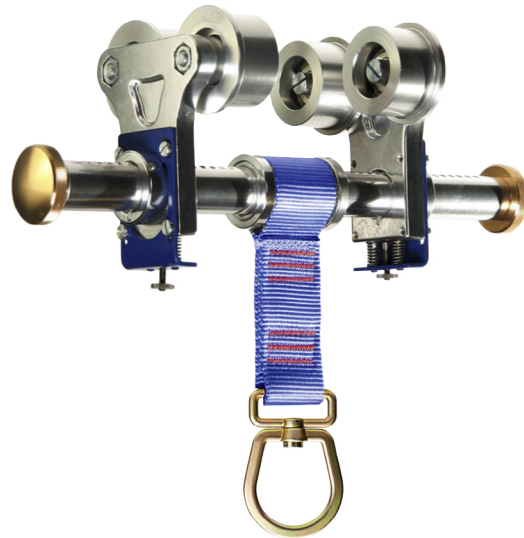

<b>Description</b>	Beam trolley anchor
<b>Beam Flange Width Range</b>	3in - 10 in
<b>Beam Flange Thickness</b>	Up to 2.5 in
<b>Weight</b>	7.2 lbs (3.26 kg)
<b>Maximum Capacity</b>	310 lbs (140 kg)
<b>Materials &amp; Components</b>	Cross Bar - Aluminum Rollers - Aluminum Webbing - Polyester Swivel - Zinc-plated steel Spring - Stainless steel Hardware - Stainless steel
<b>Static Tensile Strength</b>	5,000 lbs (22.25 kN) minimum
<b>Applicable Standards</b>	Meets OSHA 1926.502 CE 0321 / EN 795:1996 (+A1:2000) Class B ANSI Z359.1 - ANSI Z359.7

\*Anchorage used for attachment of personal fall arrest equipment shall be independent of any anchorage being used to support or suspend platforms and be capable of supporting at least 5,000 (22.2kN) pounds per employee attached.