




safewaze.com | (P) 704-262-7893 | (F) 704-262-9051
 322 Industrial Court, Concord, NC 28025

TECHNICAL DATA SHEET

**** Item pictured - Part # 018-5028**

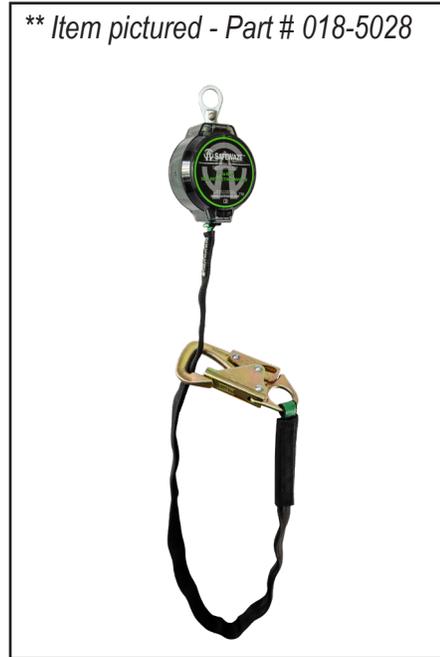

7' Web Tie Back SRD Series

Features and Benefits

Safewaze™ 7' Web Tie Back SRD's are designed to be used as a single-person fall protection device. All configurations feature a unique clear plastic housing for enhanced unit inspections and a revolutionary internal braking system, which alleviates the need for an external shock pack in such a small, ergonomic SRL. Fall indicator is sewn into webbing.

Length of Web 7 ft (2.13 m)

Weight of Unit *(See Page 2 for configuration options and weights)*

Materials High-strength clear plastic housing
 .77 in (19.5 mm) Ultrahigh Molecular Weight Webbing
 Steel Tie Back snap hook

Hook Ratings 5,000 lbs (2267.96 kg) Tensile Strength
 3,600 lbs (1632 kg) Gate Rated

Maximum Arresting Force <1,800 lbs (816.47 kg)

Maximum Arrest Distance 24 in (60.96 cm) if used above Dorsal D-ring
 54 in (137.16 cm) if used up to a maximum of 2 ft below Dorsal D-ring

Maximum Working Load ANSI 130-310 lbs (58.97-140.61 kg)
 OSHA up to 420 lbs (190.51 kg)

Webbing Tensile Strength 4,200 lbs (1905.09 kg)

Applicable Standards Meets OSHA 1926.502 - ANSI A10.32



safewaze.com | (P) 704-262-7893 | (F) 704-262-9051
 322 Industrial Court, Concord, NC 28025

7' Web Tie Back Series Single Leg Configuration Options

SINGLE	Web Connection		Housing Connection			Additional Tie back Length in Feet	3/4" Steel Tie Back Length in Inches	Material	Housing	No Carabiner	Triple Lock Steel Carabiner	Aluminum Carabiner	Weight in lbs. including carabiner
													
018-5028			WEB	X	PLASTIC	X							2.5
018-5029			WEB	X	PLASTIC		X						3.1
018-5030			WEB	X	PLASTIC						X		2.9
018-5031			WEB	X	PLASTIC							X	2.8