




[safewaze.com](http://safewaze.com) | (P) 704-262-7893 | (F) 704-262-9051  
 322 Industrial Court, Concord, NC 28025

## TECHNICAL DATA SHEET

### 019-4010

#### 360° Roof Anchor

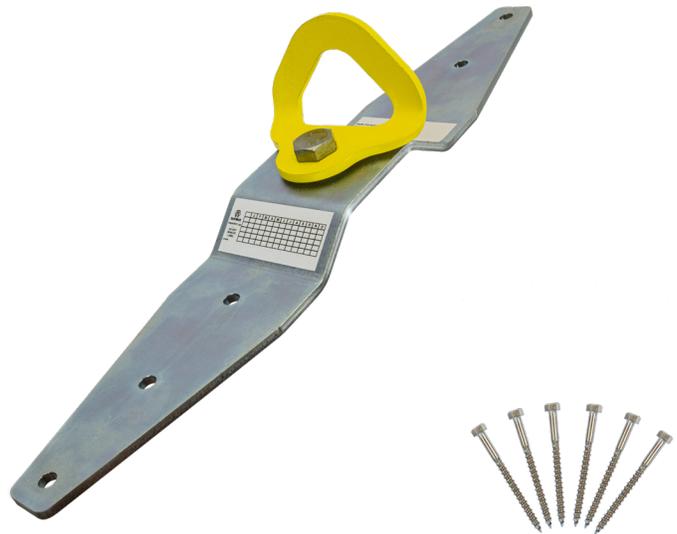

<b>Description</b>	Reusable roof anchor for wood. Installs with 6 threaded fasteners. Fasteners may be used multiple times if pilot hole is drilled prior to installation. Attachment point rotates to provide a full 360° working radius. Used for fall protection-anchor point.
<b>Fasteners</b>	(6) 1/4 in x 3 in Stainless Hex Head Lag Screws included for wood installation
<b>Length</b>	17.25 in (438.15 mm)
<b>Width</b>	3 in (76.2 mm)
<b>Weight</b>	3.0 lbs (1.36 kg)
<b>Thickness</b>	0.19 in (5 mm)
<b>Attachment Point</b>	3.75 in (95.25 mm) OD / 2.25 in (57.15 mm) ID
<b>Maximum Capacity</b>	Single person - 310 lbs (140.61 kg) including person, tools, and materials
<b>Materials</b>	Zinc Plated Steel (Base), Painted Steel (Connection Point)
<b>Minimum Tensile Strength</b>	5000 lbs (2267.96 kg)
<b>Applicable Standards</b>	Meets OSHA 1926.502

\*Anchorages used for attachment of personal fall arrest equipment shall be independent of any anchorage being used to support or suspend platforms and be capable of supporting at least 5,000 (22.2kN) pounds per employee attached.