



SW8008-11LE

Latitude Edge 11' Single Cable SRL

FEATURES :


- Class B SRL when used for Leading Edge and Non-Leading Edge use
- 360/180° attachment point
- Behind the web bracket
- 3/16" galvanized steel cable
- Nylon housing
- Cooling air mesh lined protective shock pack cover
- Steel snap hook

FALL ARREST POINT(S) :

- 1 Snap Hook

ITEM WEIGHT :

- 5.1lbs (2.3kg)

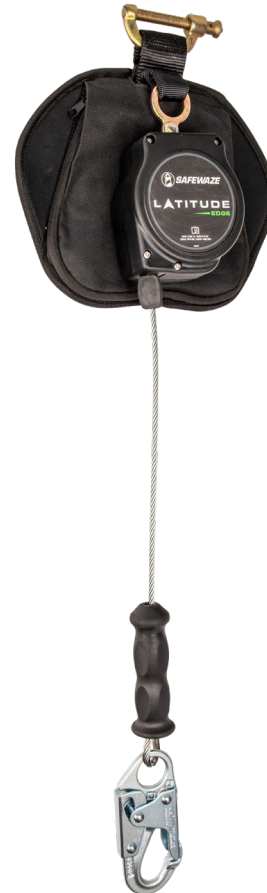

USER WEIGHT CAPACITY	
ANSI	130-310lbs (141kg)
OSHA	420lbs (191kg)

STANDARD COMPLIANT WITH	
ANSI	Z359.14, A10.32
OSHA	1926.502

HOOK RATING	
Hook Tensile Strength	5,000lbs (2267.96kg)
Hook Gate Rated	3,600lbs (1632.93kg)
CLASS B SRL RATING	
Max Arresting Force	<1,800lbs (816.47kg)
Max Arrest Distance	<54in (1371.6mm)

COMPONENT	MATERIAL SPECIFICATION
Housing	Nylon
Cable	3/16" galvanized steel cable
Bracket	Zinc plated steel
Snap Hook	Steel



SW8008-11LE-ALU

Latitude Edge 11' Single Cable SRL : Alu Snap Hook

FEATURES :


- Class B SRL when used for Leading Edge and Non-Leading Edge use
- 360/180° attachment point
- Behind the web bracket
- 3/16" galvanized steel cable
- Nylon housing
- Cooling air mesh lined protective shock pack cover
- Aluminum snap hook

FALL ARREST POINT(S) :

- 1 Snap Hook

ITEM WEIGHT :

- 4.7lbs (2.1kg)

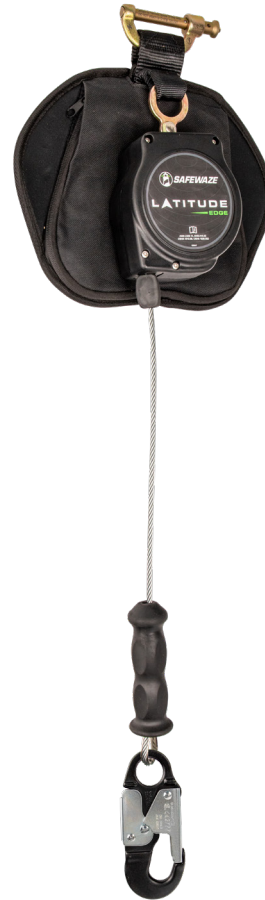

USER WEIGHT CAPACITY	
ANSI	130-310lbs (141kg)
OSHA	420lbs (191kg)

STANDARD COMPLIANT WITH	
ANSI	Z359.14, A10.32
OSHA	1926.502

HOOK RATING	
Hook Tensile Strength	5,000lbs (2267.96kg)
Hook Gate Rated	3,600lbs (1632.93kg)
CLASS B SRL RATING	
Max Arresting Force	<1,800lbs (816.47kg)
Max Arrest Distance	<54in (1371.6mm)

COMPONENT	MATERIAL SPECIFICATION
Housing	Nylon
Cable	3/16" galvanized steel cable
Bracket	Zinc plated steel
Snap Hook	Aluminum



SW8008-11LE-RBH

Latitude Edge 11' Single Cable SRL : Rebar Hook

FEATURES :

- Class B SRL when used for Leading Edge and Non-Leading Edge use
- 360/180° attachment point
- Behind the web bracket
- 3/16" galvanized steel cable
- Nylon housing
- Cooling air mesh lined protective shock pack cover
- Steel rebar hook

FALL ARREST POINT(S) :

- 1 Rebar Hook

ITEM WEIGHT :

- 6lbs (2.7kg)



USER WEIGHT CAPACITY	
ANSI	130-310lbs (141kg)
OSHA	420lbs (191kg)

STANDARD COMPLIANT WITH	
ANSI	Z359.14, A10.32
OSHA	1926.502

HOOK RATING	
Hook Tensile Strength	5,000lbs (2267.96kg)
Hook Gate Rated	3,600lbs (1632.93kg)
CLASS B SRL RATING	
Max Arresting Force	<1,800lbs (816.47kg)
Max Arrest Distance	<54in (1371.6mm)

COMPONENT	MATERIAL SPECIFICATION
Housing	Nylon
Cable	3/16" galvanized steel cable
Bracket	Zinc plated steel
Rebar Hook	Steel



SW8008-11LE-RBHALU

Latitude Edge 11' Single Cable SRL : Alu Rebar Hook

FEATURES :

- Class B SRL when used for Leading Edge and Non-Leading Edge use
- 360/180° attachment point
- Behind the web bracket
- 3/16" galvanized steel cable
- Nylon housing
- Cooling air mesh lined protective shock pack cover
- Aluminum rebar hook

FALL ARREST POINT(S) :

- 1 Rebar Hooks

ITEM WEIGHT :

- 5.6lbs (2.5kg)



USER WEIGHT CAPACITY	
ANSI	130-310lbs (141kg)
OSHA	420lbs (191kg)

STANDARD COMPLIANT WITH	
ANSI	Z359.14, A10.32
OSHA	1926.502

HOOK RATING	
Hook Tensile Strength	5,000lbs (2267.96kg)
Hook Gate Rated	3,600lbs (1632.93kg)
CLASS B SRL RATING	
Max Arresting Force	<1,800lbs (816.47kg)
Max Arrest Distance	<54in (1371.6mm)

COMPONENT	MATERIAL SPECIFICATION
Housing	Nylon
Cable	3/16" galvanized steel cable
Bracket	Zinc plated steel
Rebar Hook	Aluminum