


The closest you can get to an all-purpose lanyard.

Leading Edge Lanyards

These 6' energy absorbing lanyards feature multi-class, all-in-one versatility— plus proprietary intuitive tear webbing specially engineered by Safewaze.

- **VERSATILE SOLUTION:** Protection for users of any weight class working at both 6' (overhead) and 12' (foot level) free fall heights.
- **INNOVATION PROTECTION:** Intuitive tear webbing actively responds to the dynamic load requirements of the user, dependably reducing fall arrest forces in various conditions.
- **PROVEN DURABILITY:** Built for extreme conditions with 1/4" aircraft grade cable and ballistic shock absorber cover.

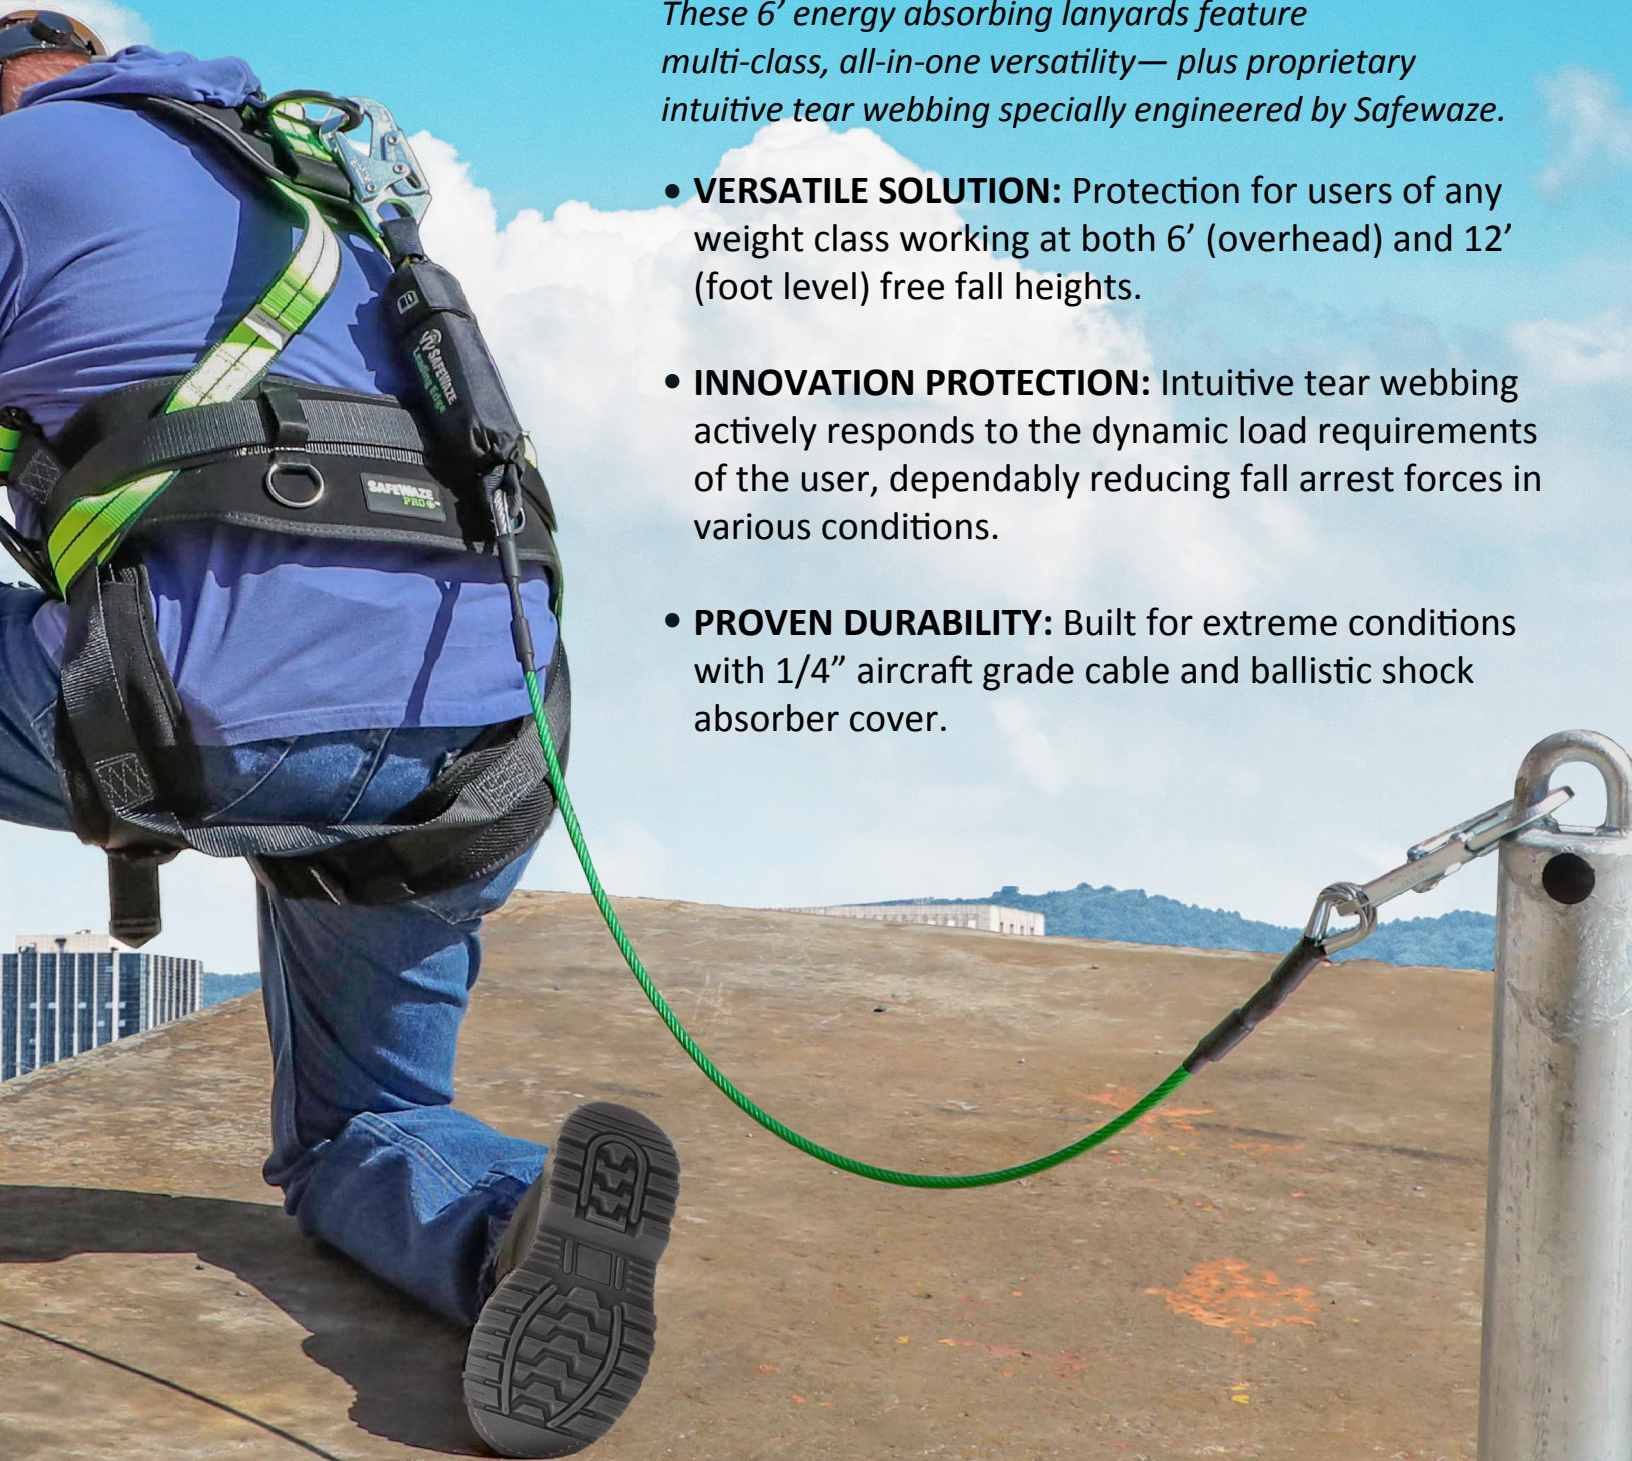



019-2016

- Dual leg
- 1 Forged aluminum snap hook
- 2 Swivel aluminum rebar hooks



019-2015

- Dual leg
- 1 Forged aluminum snap hook
- 2 Swivel aluminum snap hooks



019-2014

- Dual leg
- 1 Forged steel snap hook
- 2 Forged steel rebar hooks



019-2012

- Dual leg
- 3 Forged steel snap hooks



019-2013

- Single leg
- 1 Forged steel snap hook
- 1 Forged steel rebar hook



019-2011


- Single leg
- 2 Forged steel snap hooks

Versatile ✓ Innovative ✓ Durable ✓

Plus, attention to details that deliver premium quality and ease of use.



Swaged cable with shrink wrapped tube for added protection

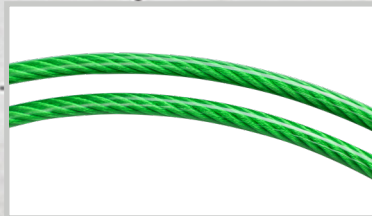

High visibility green cable for easy identification during safety checks



Swivel connection options for increased mobility and range of motion



Protective cover for shock pack with intuitive tear webbing and labels

SPECS:

- 1/4" coated high visibility cable
- Minimum breaking strength 5,000 lbs.
- ANSI Weight Capacity: 130-310 lbs. (58.94-140.61 kg)
- OSHA Weight Capacity: Up to 420 lbs. (191 kg)
- Meets ANSI Z359.13, ANSI A10.32
- Meets OSHA 1926.502, OSHA 1910.66

