






FS-EX2517

SafeLink Intermediate Anchorage Post and Base

LIFELINE SPAN	REQUIRED CLEARANCE
15 ft	7'0"
20 ft	7'0"
25 ft	7'0"
30 ft	7'0"
35 ft	7'9"
40 ft	8'5"
45 ft	9'2"
50 ft	9'11"
55 ft	10'6"
60 ft	10'10"
65 ft	11'10"

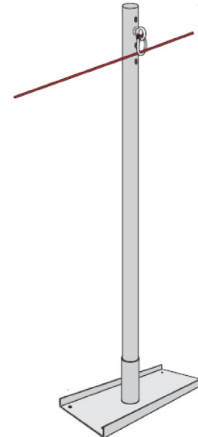

Features and Benefits

The Safelink Intermediate Anchorage Post is a base designed for use with the Safewaze Safelink HLL System. Provides reliable support as the intermediate post for lifeline spans greater than 65'.

User Weight Capacity

ANSI 130-310 lbs (140.6 kg)

Standards Compliant With

ANSI	N/A
OSHA	1926.502

Weight

25 lbs (11.3 kg)

Length

Base - 24 in (609.6 mm)

Width

Base - 11.5" (292.1 mm); Post - 2" dia. (50.8 mm)

Height

Base - 8" (203.2 mm); Post - 78" (2 m)

Required Attachment Hardware

Base installation to be secured to the soffit using:
(4) 3/8" (9.6 mm) x 1-1/2" (38.1 mm) lag bolts with at least (2) into the runner

Material Specifications:	
Base and Post	Stamped forged steel base and post (Powdercoated)
Eye bolt and Shackle	Drop Forged Steel