

SMOOTH TRAILING FOR MORE  
FREEDOM OF MOVEMENT

# SLIDING BEAM ANCHORS

*ENGINEERED FOR EFFICIENCY*

- *Hands-free mobility*
- *Lightweight & compact*
- *One-handed trigger action*
- *Dual adjustment*






## BEAM WALKER EASY SLIDER

### SHARED FEATURES of sliding beam anchors

- Smooth trailing action follows user for hands-free mobility
- Lightweight aluminum construction with steel D-rings
- Easy, one-handed lock & release trigger action
- Temporary, portable anchor rugged enough for repeated use

### UNIQUE FEATURES

- **180° ROTATING D-RING:** Pivots for greater mobility
- **NYLON ROLLERS:** Increased slide efficiency
- **REPLACEMENT JAW LINERS:** Save money, extend anchor life and restore original slide functionality

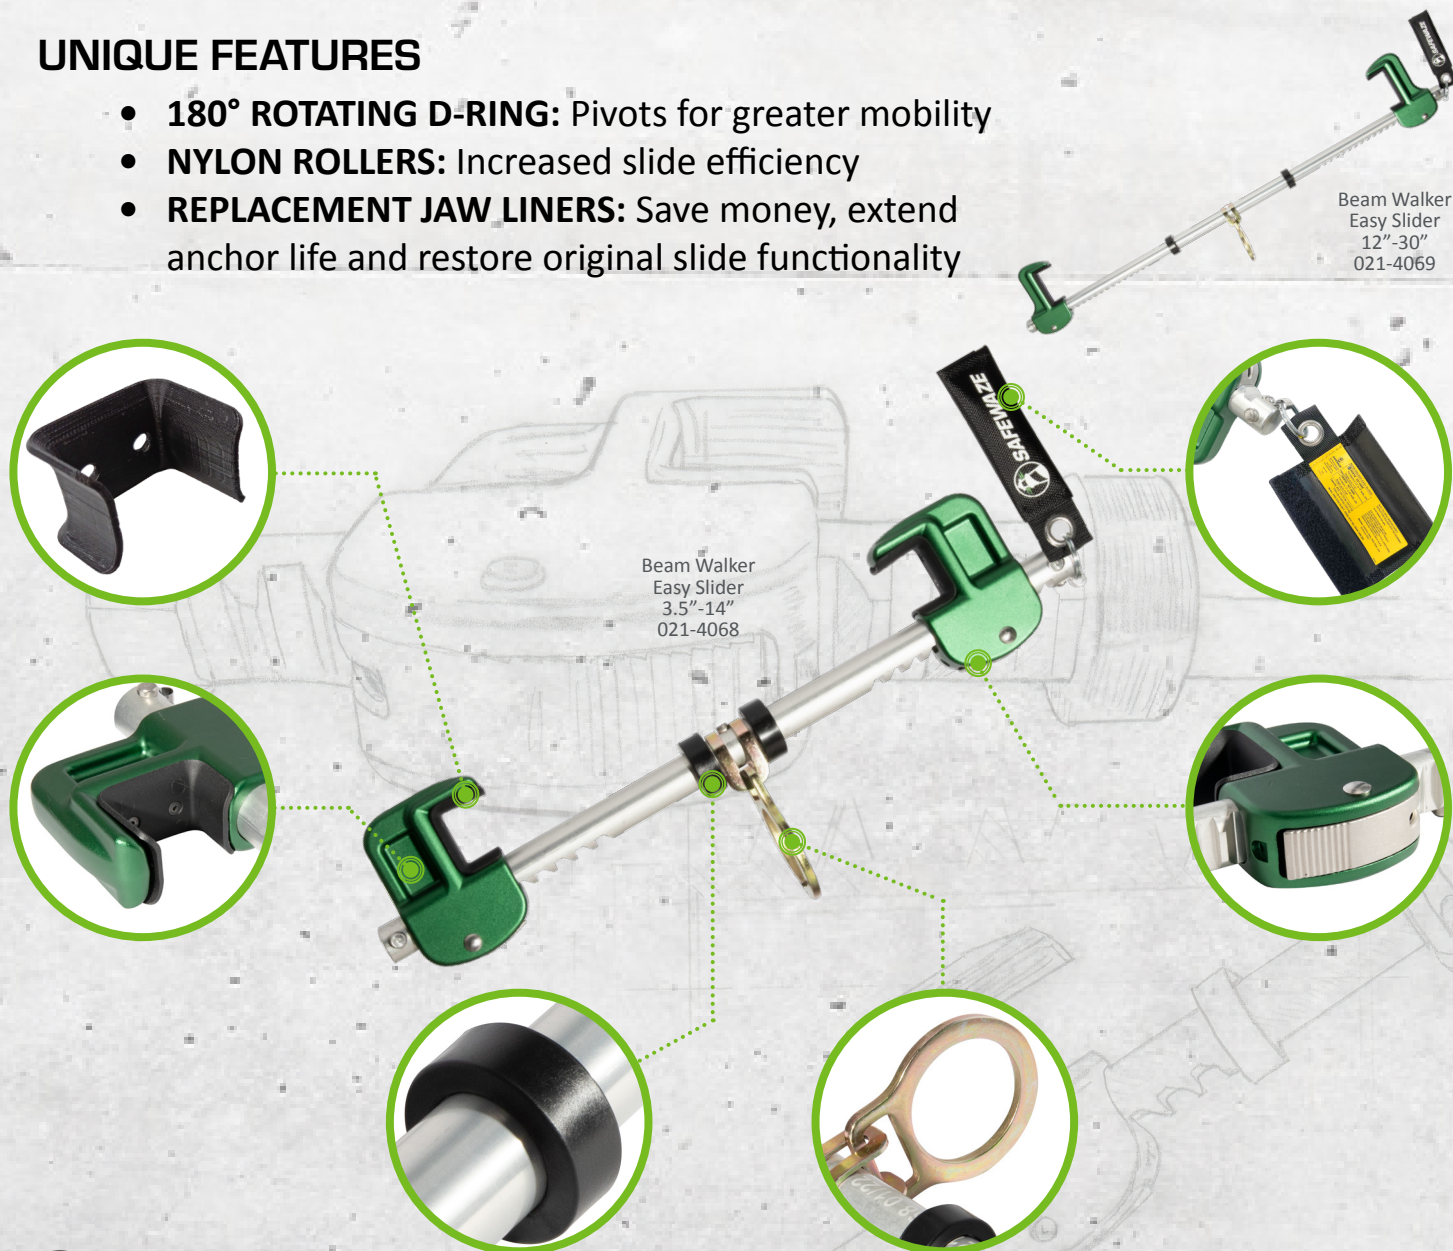


## PREMIER SLIDING BEAM ANCHOR

### (beam anchor shared features continued)

- Two adjustable jaws for quick installation
- Versatile use with overhead or foot level tie-off
- Extended OSHA weight capacity up to 420 lbs.
- Protective cover keeps labels in compliance

### UNIQUE FEATURES

- **180°/360° SWIVEL D-RING:** Rotates fully in all directions for maximum mobility
- **PERMANENT JAW LINERS:** Reinforced jaws for sturdy yet smooth sliding action

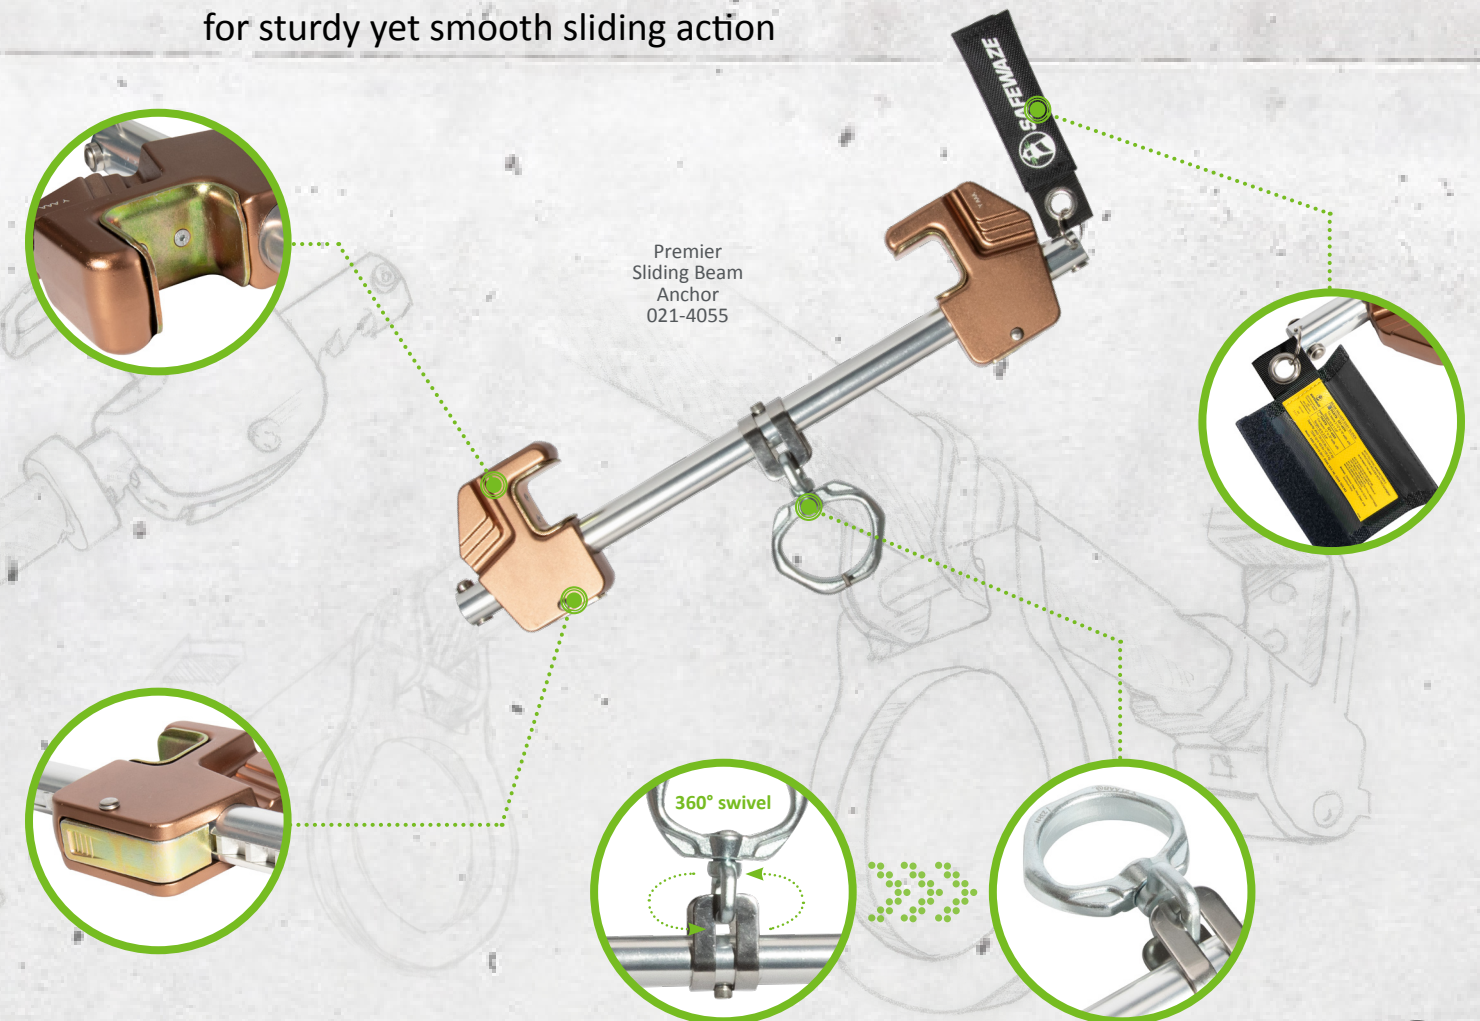





# SLIDING BEAM ANCHORS

Lightweight anchor points with hands-free mobility designed for easy attachment to I-beams and other structural components.

	021-4055	Premier Sliding Beam Anchor	Overall Length: 19.5" Beam Flange Width Range: 4"-13" Beam Flange Thickness: Up to 1.25"
	021-4068	Beam Walker Easy Slider 3.5"-14"	Overall Length: 19.5" Beam Flange Width Range: 3.5"-14" Beam Flange Thickness: Up to 1.25"
	021-4069	Beam Walker Easy Slider 12"-30"	Overall Length: 37" Beam Flange Width Range: 12"-30" Beam Flange Thickness: Up to 2.6"
	021-4071	Replacement for 021-4068 2 Jaws, 4 Fasteners	Flanges to fit up to 1.25"
	021-4074	Replacement for 021-4069 2 Jaws, 4 Fasteners	Flanges to fit up to 2.6"

**FROM ANCHORS, BODYWEAR AND CONNECTORS TO DESCENT AND RESCUE, WE'VE GOT THE EXACT FALL PROTECTION YOU NEED.**