



019-4010

360 Degree Roof Anchor

FEATURES :

- Temporary and reusable 360° working radius
- For use on wood roofs
- (6) 5/16" x 3" stainless steel lag screws provided
- Not suitable for HLL or material hauling use

INSTALLATION:

- Roof sheath must be minimum of 1/2" thick
- Anchor must be aligned on roofing panel with fall of the roof, parallel with the roof sheets, and centered over a roof joist.
- Anchor can be installed on finished shingled roof without removing shingles

LENGTH:

- 17.25 " (438.2 mm)

WIDTH:

- 3" (76.2 mm)

MINIMUM BREAKING STRENGTH:


- 5,000 lbs. (22 kN)

FALL ARREST POINT(S) :

- Swivel connection point

ITEM WEIGHT :

- 3 lbs. (1.4 kg)

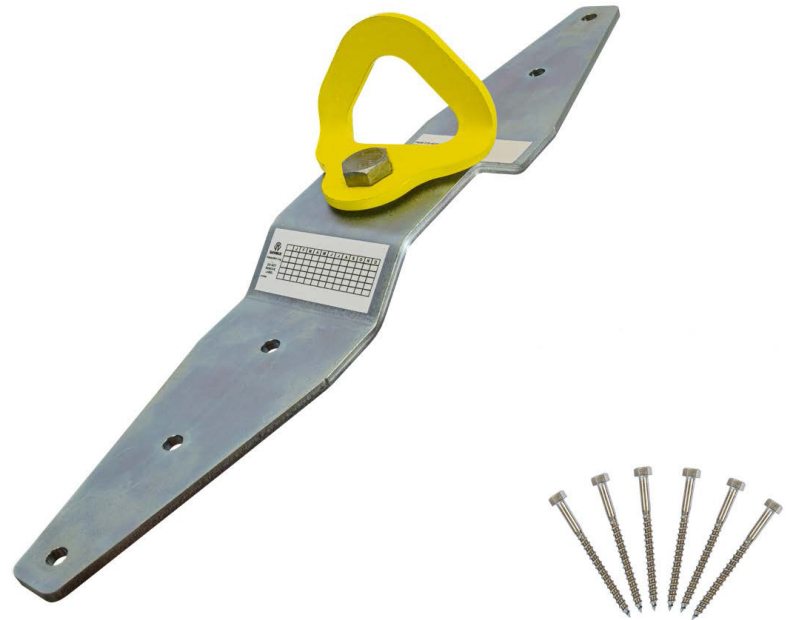

USER WEIGHT CAPACITY	
ANSI	130-310 lbs. (59-141 kg)
OSHA	Up to 420 lbs. (191 kg)

STANDARD COMPLIANT WITH	
ANSI	N/A
OSHA	1926.502, 1910.140, 1910.66

SIZE(S)	
N/A	

COMPONENT	MATERIAL SPECIFICATION
Base	Zinc-plated steel
Swivel connection point	Coated steel
Screws	Stainless steel