



023-24006 - 023-24008

7/16" Kernmantle Rope: Mounted Material Lift System

FEATURES :


- To be used with the 023-24004 Mounted Material Lift System
- Rope length is triple the lifting range to support a 2:1 setup
- Approved knots required for end terminations (see manual)

ROPE TENSILE STRENGTH:

- 7,000 lbs. (31.1 kN)

ITEM WEIGHT :

- Weight varies per length

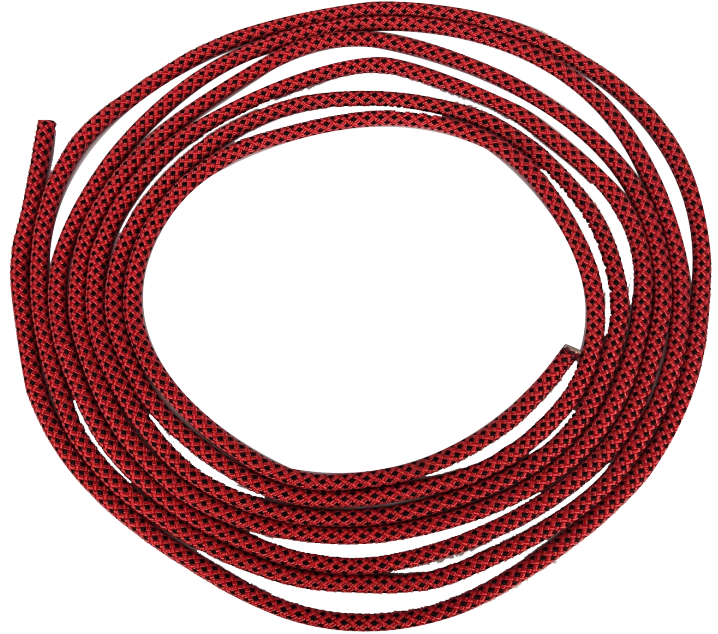

| USER WEIGHT CAPACITY | |
|----------------------|----------------------------|
| ANSI | 130-310 lbs. (59-140.6 kg) |
| OSHA | Up to 420 lbs. (190.5 kg) |

| STANDARD COMPLIANT WITH | |
|-------------------------|-----|
| ANSI | N/A |
| OSHA | N/A |

| SIZE(S) | | |
|-----------|------------------|--------------------|
| 023-24006 | 30 Feet (9 m) | 5.6 lbs. (2.5 kg) |
| 023-24007 | 60 Feet (18.3 m) | 11.3 lbs. (5.1 kg) |
| 023-24008 | 90 Feet (27.4 m) | 16.9 lbs. (7.7 kg) |
| | | |
| | | |
| | | |
| | | |
| | | |

| COMPONENT | MATERIAL SPECIFICATION |
|-----------------|-----------------------------|
| Kernmantle Rope | Polyester cover; nylon core |
| | |
| | |
| | |
| | |
| | |
| | |
| | |