

**Raise the Bar
on Safety for
Material Hauling
on Scaffolding**

**MOUNTED
MATERIAL
LIFT SYSTEM**

023-24004

- 2 lifting options
- Built-in rope lock
- Swivel anchor with 5 locking positions
- Easy to install and use



VERSATILE USE.
Innovative pulley design allows you to choose the right mechanical advantage to meet your specific needs.



2:1



1:1

- » 2:1 ratio reduces effort for heavier loads
- » 1:1 allows quicker, direct lifting for greater flexibility

MOUNTED MATERIAL LIFT SYSTEM

023-24004


SAFER THAN A TRADITIONAL WHEEL

- » A traditional wheel has no rope lock to prevent dropped materials from crashing down.
- » The Safewaze lift pulley has a built-in rope lock for increased protection of workers and materials.



TRADITIONAL WHEEL

No rope lock

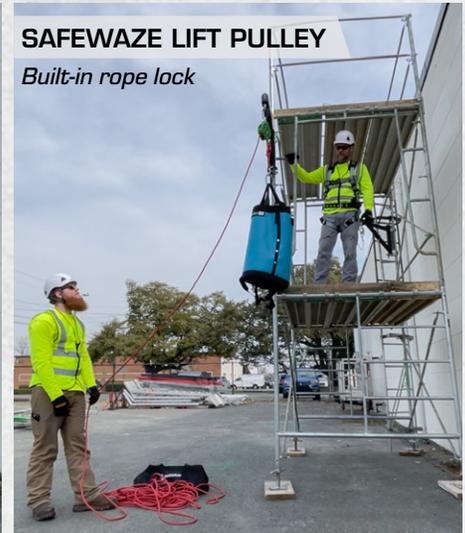

SAFEWAZE LIFT PULLEY

Built-in rope lock



Unique pivoting system increases safety when loading and unloading



Easy one-handed swivel, then securely locks into one of five angled settings



Installs quickly directly to vertical post with just two clamps



Flexible mounting locations clamps directly to vertical, supported scaffolding

7/16" (11 mm) Kernmantle Rope

Rope sold separately allowing user to select required length:

SKU	2:1 Advantage Length	Actual Length
023-24006	30'	90'
023-24007	60'	180'
023-24008	90'	270'



System replacement components:

SKU	Product Name
023-24009	Aluminum Hauling Pulley
023-24010	Aluminum Rope Lock

MOUNTED MATERIAL LIFT KEY SPECS:

Weight: 35 lbs.
 Fits Scaffolding with 1.6"-2" diameter
 Lift Dimensions: 40"x18"x2.4"
 Working Load Limit: 500 lbs. (226.8 kg)



NOTE: THIS SYSTEM IS NOT FOR USE AS FALL PROTECTION

