

**Safety Within Reach –
Anchoring from the Ground Up!**

REACH ANCHOR ASSEMBLY

024-4109

» **VERSATILE**

Connect to I-Beams, pipes
and other rated structures

» **SAFER**



Increase worker safety by
setting anchor point from
the ground

» **CONVENIENT**

Compact, lightweight and
portable

EASY 2-STEP INSTALLATION:


- 1 Attach Reach to structure
- 2 Simply raise PFAS

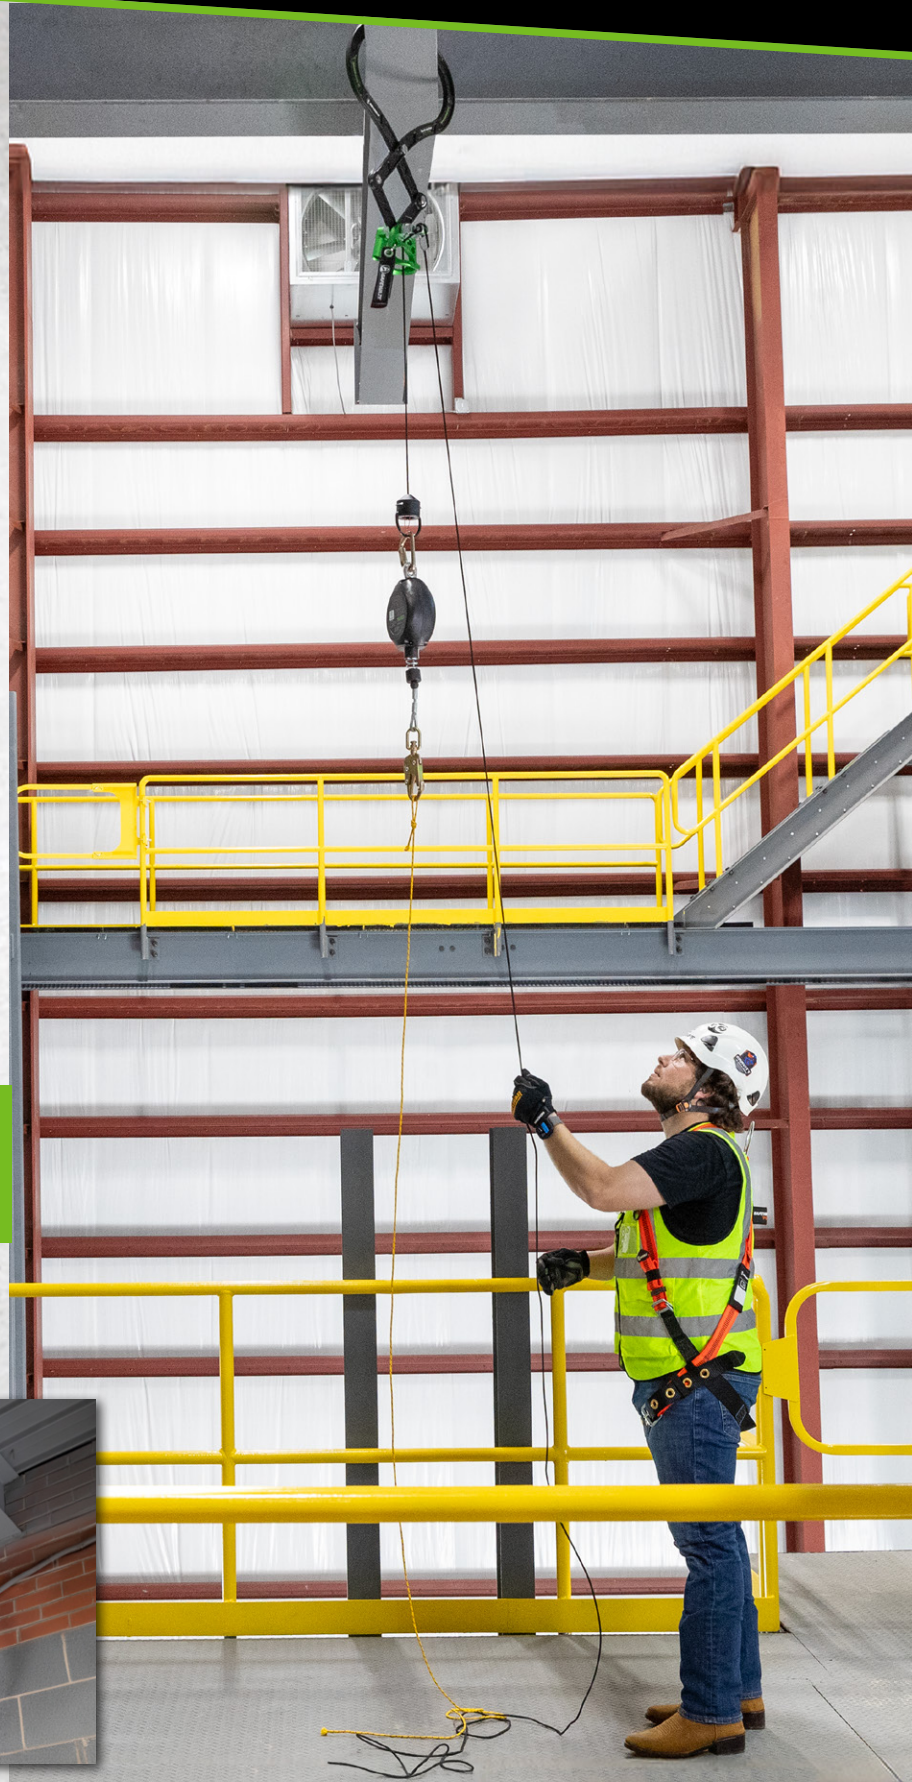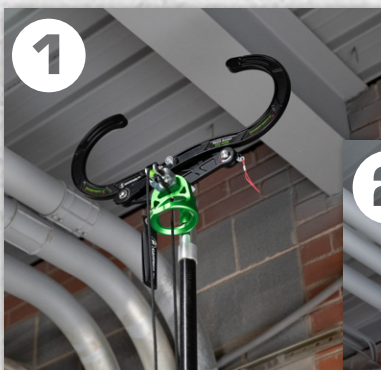

REACH ANCHOR ASSEMBLY

Connect to a variety of rated structures

- ① I-BEAMS – Directly to beam flanges up to 12"
- ② PIPES – Around pipes with a max diameter of 6"
- ③ PLUS – D-rings, sliding beams and anchor straps with a minimum connection point diameter of 2"

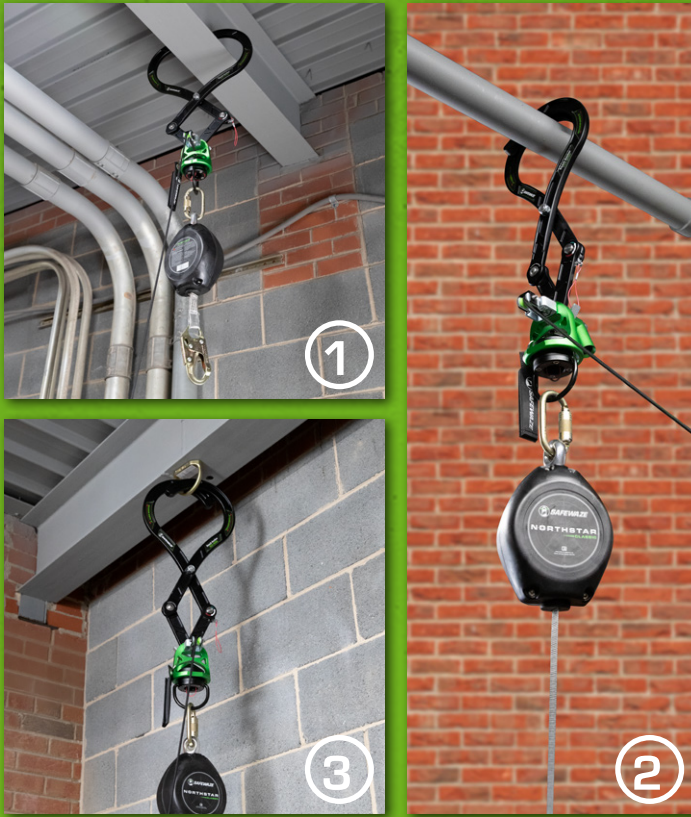

024-4109




Non-conductive telescoping pole is lightweight to allow safe, easy connection

REACH ANCHOR KEY SPECS:

Weight (full assembly): 10.3 lbs. (4.7 kg)
Dimensions (anchor): 27.2" x 8.9" x 6.3"
 (690mm x 225mm x 160mm)
Minimum Breaking Strength: 5,000 lbs. (22 kN)
Working Load Limit: 1,000 lbs. (4.4 kN)
Maximum Install Height: 20' from working surface
Standards: ANSI Z359.18-2017 Type A,
 OSHA 1926.502, 1910.140, 1910.666



Connect SRL to shuttle after anchor is secured in place – this allows anchor to be easily raised without the added weight of an SRL

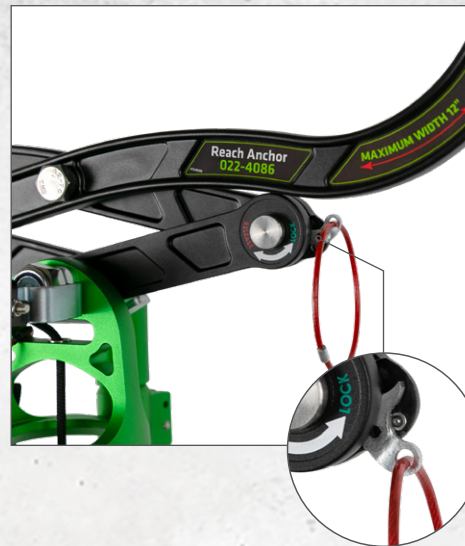

Self-tightening jaws with safety toggle to prevent accidental disengagement



025-4125

This two-in-one hook and connector base uses a powerful magnet to remotely secure the pole to the anchor, while the integrated hook allows quick toggle access to release the jaws and lower the shuttle.

SKU	Product Name (replacement components)
022-4086	Reach Anchor
023-4107	Reach Anchor Pole
025-4125	Reach Anchor: Pole Head Attachment



225 Wilshire Avenue SW, Concord NC 28025

800-230-0319

safewaze.com

