



SAFEWAZE

**CATEGORY
SPOTLIGHT**



SPECIALIZED PROTECTION FULL ARC FLASH LINE

Specifically engineered and tested to withstand the unique hazards of at-height arc flash environments – plus the Safewaze comfort and quality you count on.



THE MOST COMPREHENSIVE SELECTION OF ARC FLASH FALL PROTECTION AVAILABLE

| | |
|-------------------------------------|-----|
| Arc Flash Aramid Harnesses | 2-3 |
| Arc Flash Nylon Harnesses | 4 |
| Arc Flash Trauma Relief | 5 |
| Specialty Arc Flash Tower Equipment | 5 |
| Arc Flash SRL | 6-7 |
| Arc Flash Aramid Lanyards | 8-9 |
| Arc Flash Restraint Lanyards | 9 |
| Arc Flash Tool Anchor and Tethers | 10 |
| Arc Flash D-Ring Extender | 11 |
| Arc Flash Choker Anchors | 11 |

FOR USE IN EXTREME
HEAT ENVIRONMENTS

**ARC
FLASH** 

**HOT
WORKS** 

WELDING 



Look for our new items!



020-1252



ARC FLASH ARAMID CONSTRUCTION HARNESS



PREMIUM PROTECTION

- Crafted with high-quality, flame-retardant and heat-resistant ASTM approved aramid webbing
- Non-conductive materials provide superior safety in high-risk electrical environments

DURABILITY & COMFORT

- Aramid webbing offers exceptional resistance to abrasion, cuts and wear, ensuring long-lasting performance
- Built with Nomex® branded shoulder, waist and leg pads for all day comfort

11 Different Configurations:

- Construction or Full Body
- D-Rings: Dorsal, Front and Side D-Rings
- Quick-Connect Chest/Legs, Mating Buckle Chest/Legs, Tongue Buckle Legs

RANGE OF OPTIONS

- Available in both construction and full body harness styles
- Offered with various D-ring configurations, including dorsal, front and side positioning
- Choose between corrosion-resistant dielectric hardware or innovative backing-protected standard hardware options

KEY SPECS:

- 40Cal rated webbing
- 700F char rated webbing
- ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
- OSHA Weight Capacity: Up to 420 lbs. (191 kg)
- Standards: OSHA 1926.502 & 1910.140, ANSI Z359.11-2021, ASTM F887



**ARC FLASH ARAMID
FULL BODY HARNESS**


INNOVATIVE BACKING PROTECTION
STEEL HARDWARE OPTION



VISIT US ONLINE AT
SAFEWAZE.COM TO VIEW THE
FULL SELECTION OF HARNESSSES



ARC FLASH NYLON FULL BODY HARNESS

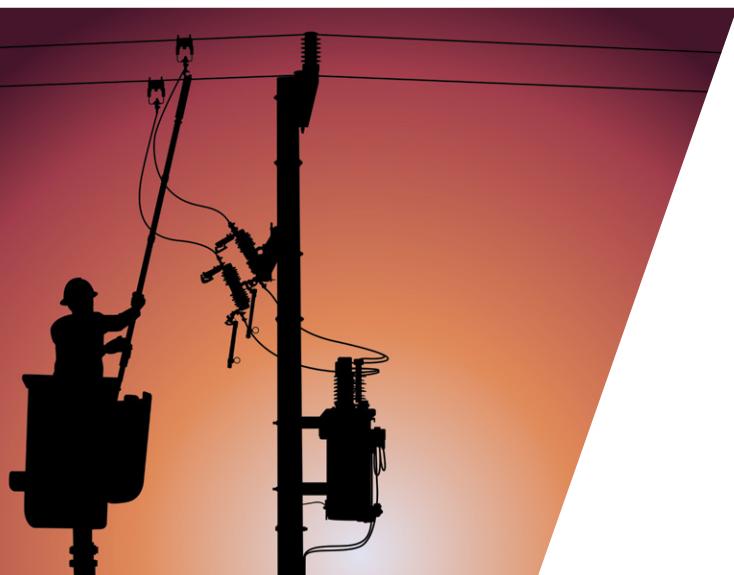

SOFT LOOP
HANDLE AND
SHOULDER
D-RINGS TO
AID RETRIEVAL

DEPENDABLE PROTECTION

- Crafted with heavy-duty mil-spec ASTM-approved webbing and coated, corrosion-resistant dielectric hardware
- Non-conductive materials provide superior safety in high-risk electrical environments

COMFORT

- Designed for a secure fit that moves and flexes with you, providing comfort as you work
- Offered in both full body or traditional H-style design

Affordable harness designed with Confined Space in mind

7 Different Configurations:

- D-Rings: Dorsal, Front, Side D-Rings, Soft Dorsal Loop, Soft Sternal Loop, Soft Loop Side D-Rings and Soft Loop Shoulder Retrieval D-Rings
- Quick-Connect Chest/Legs, Mating Buckle Chest

KEY SPECS:

- 40Cal rated webbing
- 550F char rated webbing
- ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
- OSHA Weight Capacity: Up to 420 lbs. (191 kg)
- Standards: OSHA 1926.502 & 1910.140, ANSI Z359.11-2021, ASTM F887

A WORKER CAN SUFFER EFFECTS OF SUSPENSION
TRAUMA AFTER A FALL IN AS LITTLE AS **10 MINUTES!**

ARC FLASH QUICK-ADJUST TRAUMA RELIEF


- Easily adjustable step promotes circulation
- Versatile to fit workers of all heights
- Simple to use: Open, pull, hook, step in and adjust

024-6075



SPECIALTY TOWER/UTILITIES SOLUTIONS

024-1386

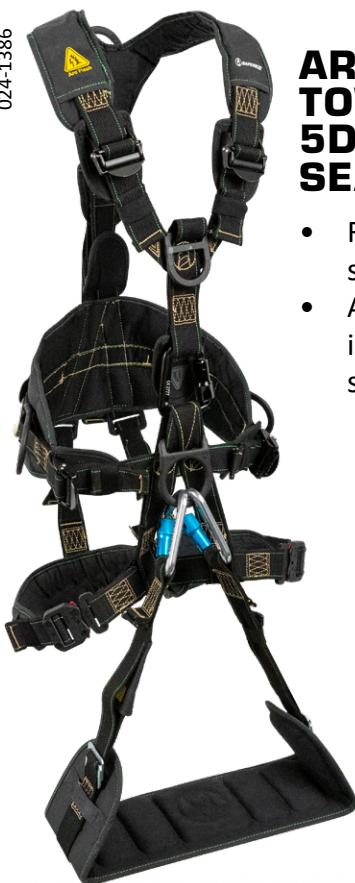

ARC FLASH WIND & TOWER HARNESS: 5D, REMOVABLE SEAT, QC LEGS

- Removable positioning/suspension seat
- Adjustable rear leg straps increases comfort while suspended or climbing



TOWER &
UTILITIES



SOLAR &
WIND ENERGY

ARC FLASH 6' ENERGY ABSORBING LANYARD: 12'FF, ARAMID, DUAL LEG, TOWER REBAR HOOK

- Designed for users working at 12' free fall heights
- Larger hook compared to standard rebar hook
- Dual leg construction for 100% tie-off





All SafeWaze Arc Flash SRLs are engineered with flame-resistant materials, non-conductive components and durable construction designed for electrical and energized environments. Choose the SRL that matches your anchoring method and application.



41 DIFFERENT SRL-Ps

7' & 10'
Length options

CLASS

1

Anchor at or above
dorsal D-ring

SHARED ARC FLASH SRL FEATURES

- Flame-resistant, heat-resistant Kevlar® or aramid webbing
- Non-conductive materials for electrical environments
- Nomex® flame-resistant label covers
- Smooth, consistent retraction
- Designed for arc flash and energized work zones

LATITUDE PRO ARC FLASH

Class 1 | SRL-P | Overhead Use

- Designed for anchor at or above dorsal D-ring
- Lightweight personal SRL worn on the harness
- Single & dual-leg configurations
- Ideal for utility, telecom and tower work

KEY SPECS:

- 40Cal rated webbing
- Actual arrest distance ≤ 27 in. (69 cm)
- ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
- OSHA Weight Capacity: Up to 420 lbs. (191 kg)
- Standards: OSHA 1910.66 & 1910.140, ANSI Z359.14-2021, ASTM F887

LATITUDE EDGE ARC FLASH

Class 2 | SRL-P | Edge Capable

- Rated for anchor above or below dorsal D-ring
- Low Class 2 arrest distance
- Exclusive dual dorsal separator bracket
- Designed for edge exposure and foot-level anchoring

6', 8' & 10'
Length options

NEW
RELEASE

CLASS
2
Anchor above or
below dorsal D-ring



LODESTAR LIFT ARC FLASH

Class 2 | Anchor-Mounted SRL | Lift Optimized

- Designed for foot-level tie-off in lifts
- SRL housing connects to the anchor — not worn on the back
- Compact, lightweight design for MEWPs and buckets



NEW
RELEASE



KEY SPECS:


- 40Cal rated webbing
- Actual class 2 arrest distance \leq 101 in
- ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
- OSHA Weight Capacity: Up to 420 lbs. (191 kg)
- Standards: OSHA 1910.66 & 1910.140,

ANSI Z359.14-2021, ASTM F887

57 VARIATIONS



ARC FLASH ARAMID ENERGY ABSORBING LANYARDS

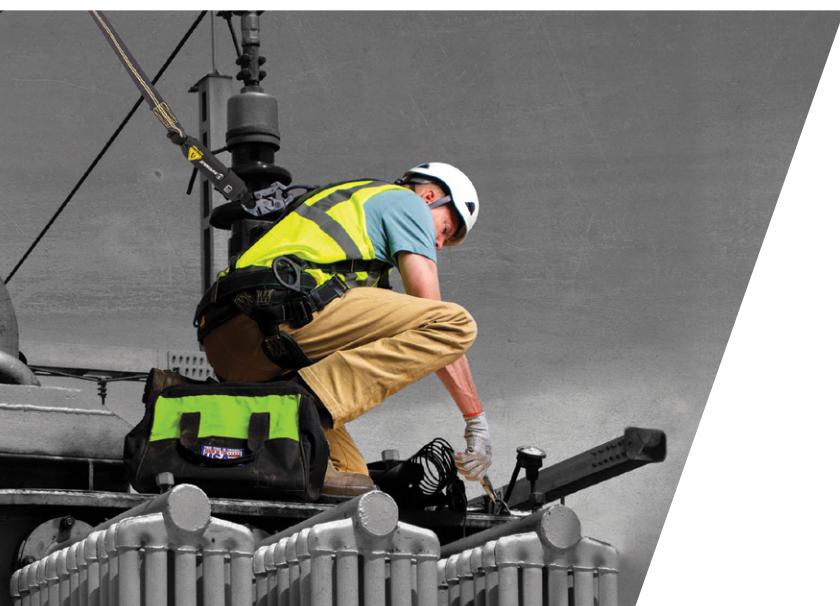

PREMIUM PROTECTION

- Crafted with high-quality, flame-retardant, and heat-resistant ASTM approved aramid webbing
- Nomex® branded label and shock pack covers keep crucial information protected
- Non-conductive materials provide superior safety in high-risk electrical environments

ENERGY ABSORBER

- Available in both external and internal energy-absorbing options
- External energy absorber with a durable shock pack utilizing efficient tear webbing
- Internal energy absorber minimizes force on the worker while eliminating the need for a bulky shock pack, offering streamlined protection

20 Different Configurations:

- Single or Dual leg
- External or internal energy absorber
- Soft loop choker connection
- Snap hooks, rebar hooks, aluminum snap hooks, aluminum rebar hooks and dielectric snap hooks

RANGE OF OPTIONS

- Available in both single-leg and dual-leg designs for added versatility
- Choose from a variety of connectors: snap hooks, rebar hooks, aluminum snap hooks, aluminum rebar hooks and dielectric snap hooks
- Option of a non-conductive soft loop for enhanced flexibility with choke-style attachment

KEY SPECS:

- 40Cal rated webbing
- 750F char rated webbing
- ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
- Standards: OSHA 1926.502, 1910.140 & 1910.66
ANSI Z359.13-2013, ASTM F887



ARC FLASH ARAMID INTERNAL ENERGY ABSORBING LANYARDS



ARC FLASH WEB RESTRAINT LANYARDS

- Available in aramid or nylon
- Adjustable 4' to 6'
- Lanyard is for positioning/restraint only

KEY SPECS:

- 40Cal rated webbing
- ANSI Weight Capacity: 130-310 lbs. (59-141 kg)
- OSHA Weight Capacity: Up to 420 lbs. (191 kg)
- Standards: OSHA 1926.502, 1910.140 & 1910.66
ANSI Z359.3-2019, ASTM F887



ARC FLASH NYLON ENERGY ABSORBING LANYARD

COMPLETE SECURITY IN EXTREME ENVIRONMENTS



5 LB. ARC FLASH TOOL ANCHOR

- Constructed with premium aramid webbing
- Quickly cinches on any location on any harness



5 & 15 LB. ARC FLASH ELASTICATED TOOL TETHER

- 40Cal rated aramid web for electric and high heat
- Increased range and energy absorption

ARC FLASH D-RING EXTENDERS

D-Ring Extender provides added protection with additional length between the harness dorsal D-ring and connection to another component of the fall arrest system. Includes aramid soft choke loop and D-ring for quick, easy connection in extreme environments.

**12" ARC FLASH
D-RING EXTENDER:
SOFT LOOP, D-RING**



022-2080

**18" ARC FLASH
D-RING EXTENDER:
SOFT LOOP, D-RING**



022-2081



ARC FLASH PROTECTION AT THE FOUNDATION

6:024-4117



ARC FLASH CHOKER ANCHOR

Specialized anchor solution providing safe, secure anchorage in arc event rated areas. Simply choke the ends around a compatible beam or other rated structure then attach a lanyard or SRL.

- Lightweight, portable and reusable anchor
- Easy to install
- Available in 3', 6' or 12'

WE CARRY A FULL RANGE OF FLASH ARC PRODUCTS

18 DIFFERENT CONFIGURATIONS



31 DIFFERENT OPTIONS



98 DIFFERENT SRLs



Arc Flash Harness Line

Dependable, superior protection plus all-day comfort. Aramid webbing, Nomex® pads and dielectric hardware options.

Arc Flash Lanyards

Premium flame and heat resistant materials: Kevlar® Aramid webbing and Nomex® shock cover available in a variety of configurations.

Arc Flash SRLs

One of the most durable line of SRLs on the market featuring side payout housing and durable webbing.



225 Wilshire Avenue SW, Concord NC 28025

•

800-230-0319

•

safewaze.com