



022-8076 through 022-8077

SafeLink I-Beam Post Base

FEATURES:


- Adjustable clamp options to mount to various size I-beams between 6"-36"
- Fits I-beam flanges up to 2-1/4" thick
- For use as a sleeve for the FS-EX5501-5 post
- Compatible with most Safewaze HLL systems
- Versatile base can be used as a single point anchor using our FS-EX2514 Whizzler Cap or as a base or intermediate for HLL systems using the FS-EX2508 Eye bolt
- Easy bolt and wingnut installation
- Convenient built-in carrying handle
- Base Dimensions: 19" x 10" x 12.5" (48.3 cm x 25.4 cm x 31.8 cm)

SYSTEM CAPACITY:

- Single point anchor use max. 1 user, ANSI 130-310 lbs. (59-141 kg), OSHA up to 420 lbs. (191 kg)
- HLL use max. 2 users per span (620 lbs. total), max. 4 users per system (1240 lbs. total)
- Minimum Breaking Strength (MBS): 5,000 lbs. (22 kN)

ITEM WEIGHT :

- Base: 52 lbs. (23.6 kg)
- 6-14" Clamp (each): 5 lbs. (2.3 kg)
- 6-36" Clamp (each): 7 lbs. (3.2 kg)
- 022-8076 - Base w/ 6"-14" Clamps - 62 lbs. (28 kg)
- 022-8077 - Base w/ 6"-36" Clamps - 66 lbs. (30 kg)

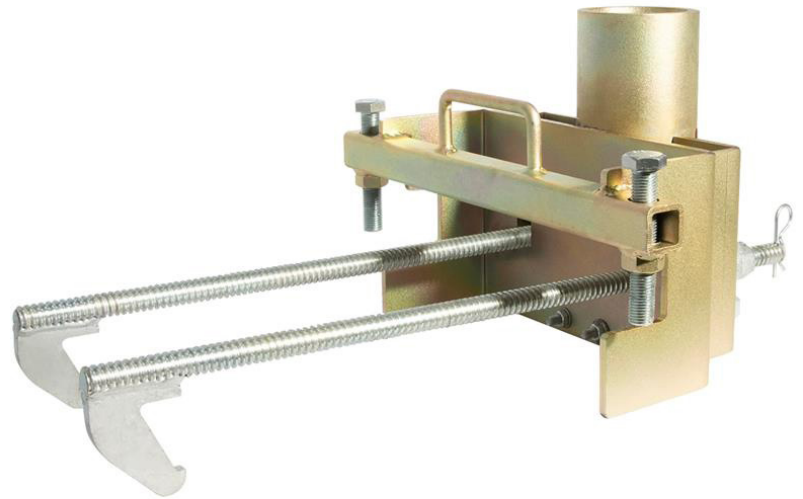

USER WEIGHT CAPACITY	
ANSI	130-310 lbs. (59-141 kg)
OSHA	See system capacity above

STANDARD COMPLIANT WITH	
ANSI	N/A
OSHA	1926.502, 1910.66

COMPATIBLE COMPONENTS	
FS-EX2514	SafeLink Whizzler Swivel Cap
FS-EX5501-5	SafeLink Anchor Post
FS-EX2508	SafeLink Eye Bolt
022-8078	SafeLink I-Beam Post Base Clamp: 6-14"
022-8079	SafeLink I-Beam Post Base Clamp: 6-36"
FS-EX10000	65' SafeLink: Come-a-long

COMPONENT	MATERIAL SPECIFICATION
Base Assembly	YCM plated steel
Clamp Assembly	Zinc-plated steel