



025-4129

Standing Seam HLL Anchor

FEATURES :


- Reusable, non-penetrating, easy to install anchor
- Designed for flat or pitched standing seam roofs with a minimum gauge 26
- Adjustable cross arm spans 24-40"
- 360-degree swivel D-ring that can be used for SRLs, energy absorbing lanyards, VLLs, and HLLs
- Includes (2) aluminum clamps each with (12) stainless steel set screws (nylon tipped screws available - sold separately)
- System capacity: 1 user as a single point, 2 users per span for HLLs
- Minimum Breaking Strength: 5,000 lbs. (22kN)

FALL ARREST POINT(S) :

- D-ring

ITEM WEIGHT :

- 24.9 lbs. (11.3 kg)

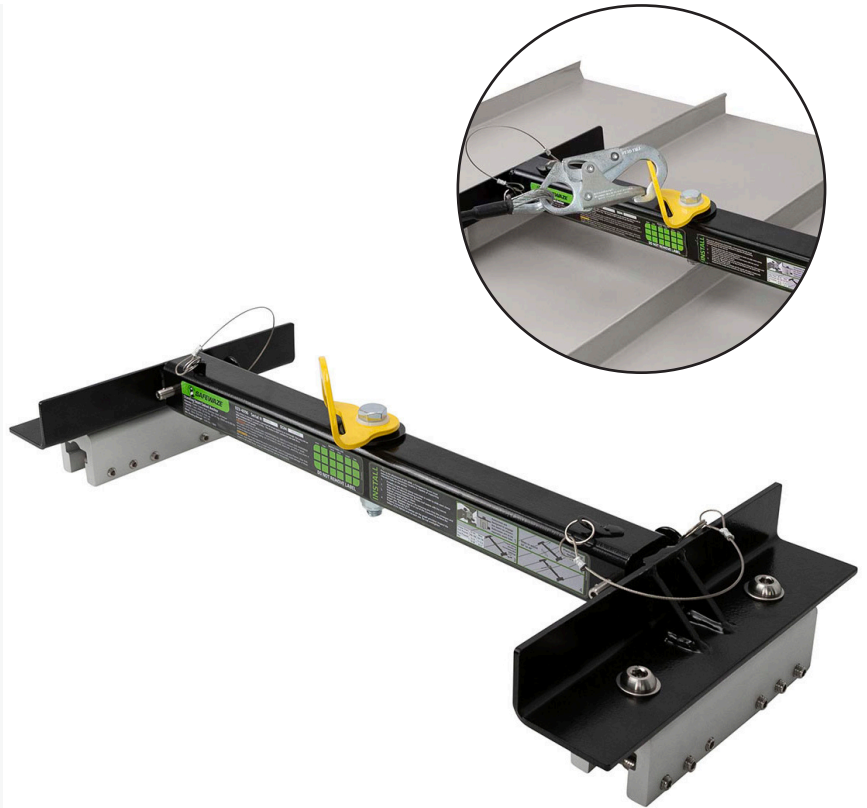

USER WEIGHT CAPACITY	
ANSI	130-310 lbs. (59-141 kg)
OSHA	Up to 420 lbs. (191 kg)

STANDARD COMPLIANT WITH	
ANSI	n/a
OSHA	1926.502, 1910.140, 1910.66

RELATED PRODUCTS	
025-4127	Standing Seam Nylon-Tipped Set Screws (12)
025-4128	Standing Seam Steel Set Screws (12)
025-4140	Replacement Standing Seam HLL Anchor Clamp

COMPONENT	MATERIAL SPECIFICATION
Anchor	Powder coated steel, stainless steel
Clamps	Aluminum, stainless steel