



Versatile Anchor for C and Z-Purlins **PURLIN ANCHOR** 025-4130


The Safewaze Purlin Anchor is a temporary or permanent anchorage solution for 12–16 gauge C and Z-purlins. Designed for upright rooftop or inverted underside installation, it features an NBR foam gasket that helps seal out moisture, dirt and debris for lasting protection.

- » Captive eye deforms to reduce stress of roof structure during a fall
- » HLL-compatible in the upright rooftop orientation
- » 5,000 lb minimum breaking strength
- » Ideal for new construction and continued rooftop access

SKU	DESCRIPTION
025-4130	Purlin Anchor
026-4144	Purlin Anchor Captive Eye Replacement

Key Specs:

Materials: Zinc-plated steel, NBR foam
Dimensions: 14.25" x 5.75" x 4.25" (36.2 cm x 14.6 cm x 10.8 cm)
MBS - 5,000 lbs. (22 kN)
Weight: 7.4-lbs. (3.4 kg)
OSHA Standards: 1926.502, 1910.140, 1910.66
 Must be installed within 12" of the I-beam support

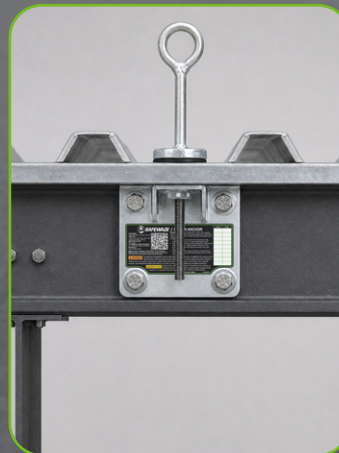

Upright Rooftop



Inverted Underside